





Fits in a standard ceiling t-grid and is ideal for offices, conference rooms, and classrooms.


- Industry leader in sound absorption with an increase in overall absorption over 1" Fiberglass Panels
- Unmatched Class A fire protection as a complete panel assembly
- Standard sizes of 23 3/4" x 23 3/4" and 47 3/4" x 23 3/4"
- Perfect product to help negate echo

125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
.93	.90	.98	1.09	1.05	1.02	*1.00

*E400 Mount

Patented Reinforced Mineral Wool Core Benefits::

- Superior low frequency and overall absorption
-  Class A fire protection (Flame Spread:10, Smoke Developed Rating:95)
- Durable cores that will last in gymnasiums or high-impact environments
- Tensile strength minimum of 2,631 lbs./sq.ft breaking load
- Compressive resistance of 547 psf at 25% compression
- Contribute to LEED® credits 
- Made using natural inorganic materials with at least 75% recycled content
- 6-8 lb. density
- Melting point of 2,150°F (ASTM E-136)
- Water repellent - will not mold, rot, or corrode

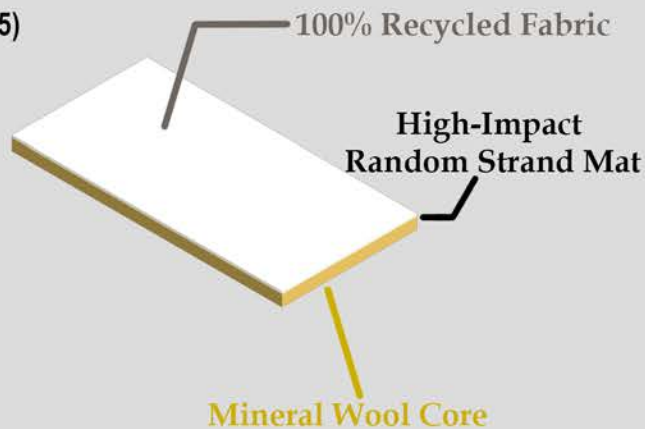

2" Ceiling Tile :: Cut Sheet